

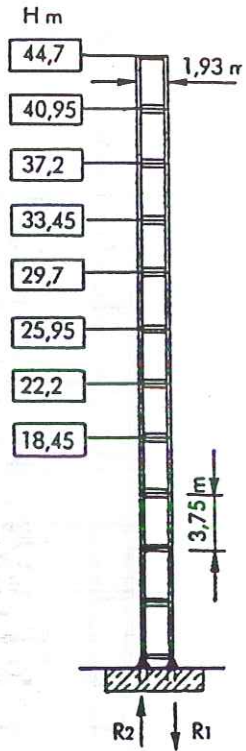


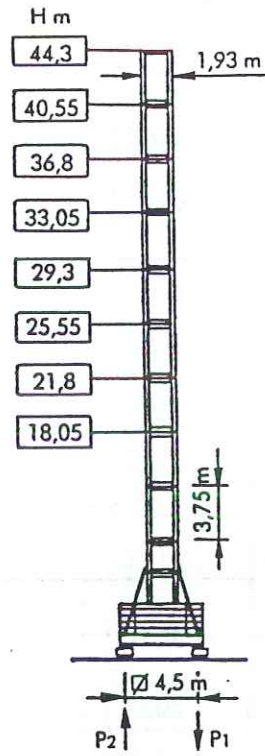


# CT 651 S 20

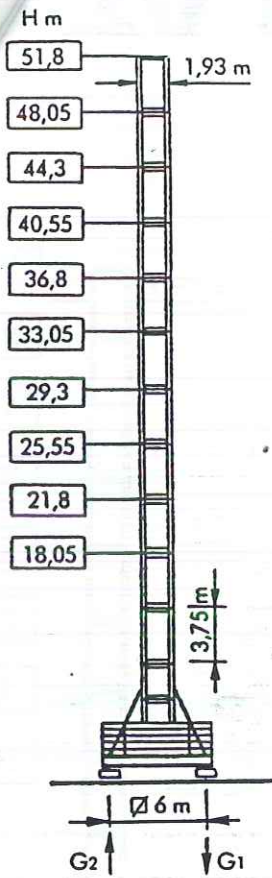


G 1	83,3 t*	88 t*
G 2		4 t*
	62,8 t	

P 1	89,7 t*	85,7 t*
P 2		6,2 t*
	58,3 t	

R 1	131,9 t*	132,5 t*
R 2	92,2 t*	91,2 t*
	51,2 t	

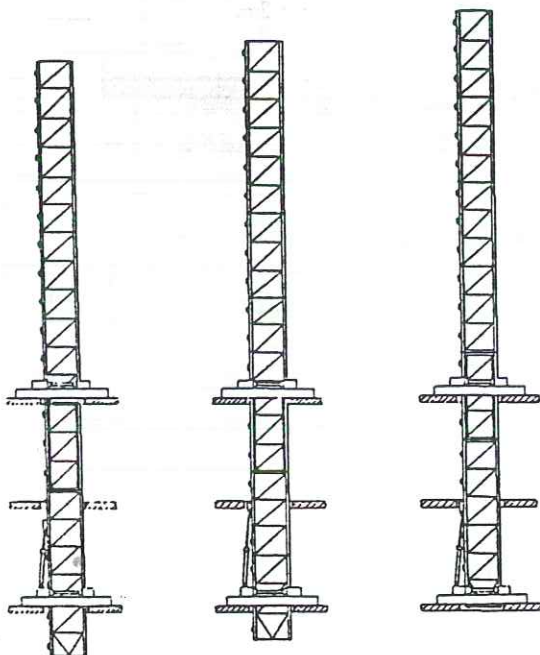

CLIMBING: H = 33,45 m

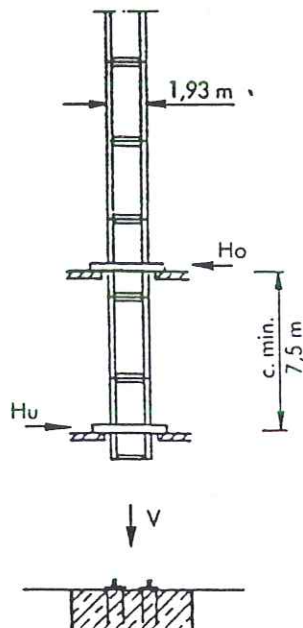

H>H max consultateci


Peso gru senza zavorra  
max H max sbraccio

\* In servizio

• Fuori servizio










Ho	32,7 t*	28 t*
Hu	30,7 t*	17,3 t*
V	73 t	




Per ulteriori informazioni vedi scheda tecnica





SENZA TOTALE RICHIESTA	ARGANI	CORRENTE TRIFASE
53 Kw	AG 40	380 V - 50 Hz
56 Kw	AWLR 505	380 V - 50 Hz
56 Kw	AWLR 506	380 V - 50 Hz
71 Kw	AWLR 706	380 V - 50 Hz

ARGANI		m/min	t	HP	Kw	
AG 40		7,5	5	40	30	220 m max
		30	5			
		60	2,5			
		3,8	10			
		15	10			
		30	5			
AWLR 505		0 → 40	5	50	37	350 m max
		0 → 50	4			
		0 → 66	3			
		0 → 100	2			
		0 → 20	10			
		0 → 25	8			
		0 → 33	6			
		0 → 50	4			
AWLR 506		0 → 33	6	50	37	350 m max
		0 → 44	4,6			
		0 → 57	3,5			
		0 → 84	2,4			
		0 → 16,5	12			
		0 → 22	9,2			
		0 → 28,5	7			
		0 → 42	4,8			
AWLR 706		0 → 47	6	70	52	350 m max
		0 → 61	4,6			
		0 → 80	3,5			
		0 → 116	2,4			
		0 → 23,5	12			
		0 → 30,5	9,2			
		0 → 40	7			
		0 → 58	4,8			

CARRELO		C3V	0-10-30-65 m/min	6/5 Kgm	6 Kw
ROTAZIONE		GVP	0 + 0,8 n/min.	2x7,5 HP	2x5,5 Kw
TRASLAZIONE		TR - TC	0-12-24 m/min	2x3,7 Kgm	2x6 Kw



# GRUCOMEDIL

Via S. Egidio 42/A - 33074 Fontanafredda (PN) - ITALY  
Tel. 0434/997580 - Telex 450256 GRUCOM I - Telefax 0434/998631


CASAGRANDE GROUP

In accordo con le normative C.E.E. 87/405 riguardanti il livello acustico

AGENTE





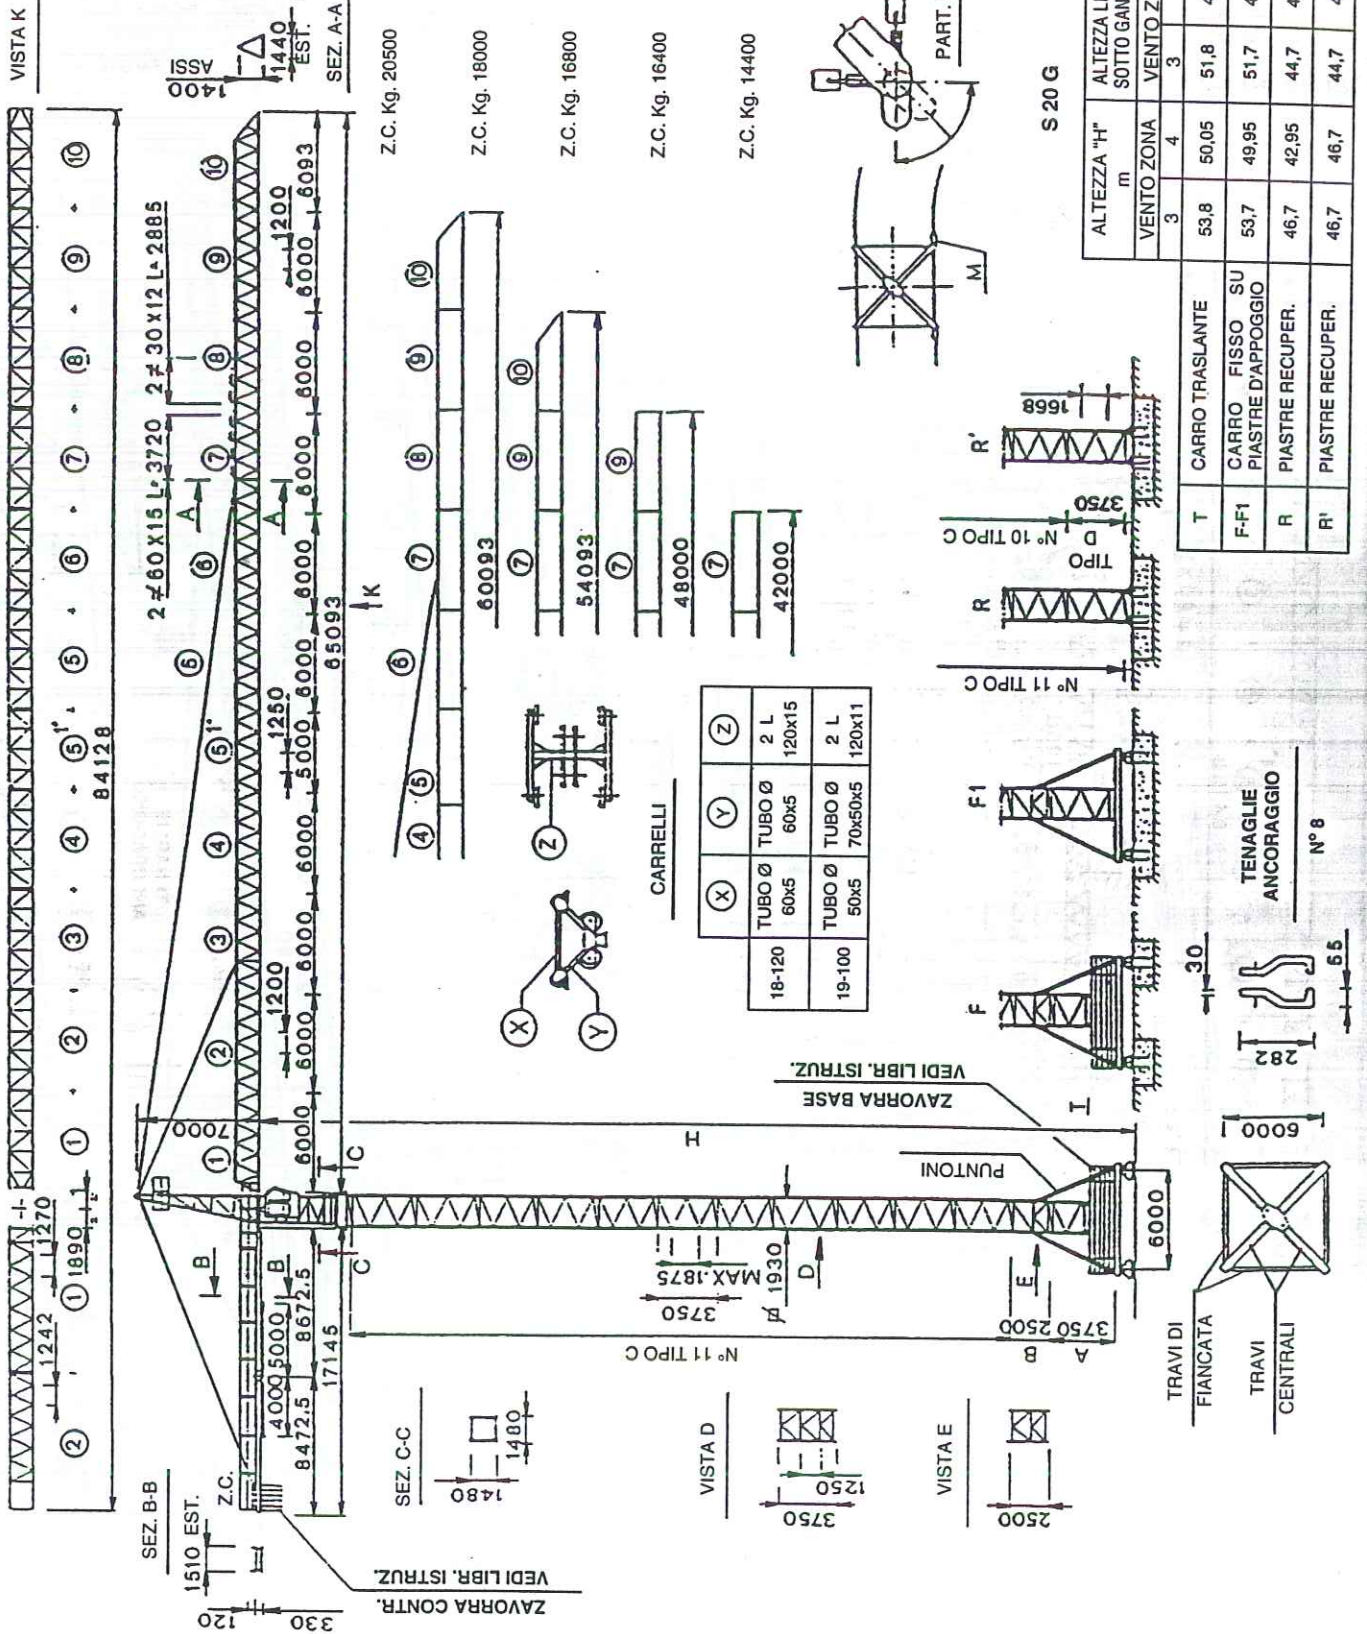

ZONA DI VENTO III = 152 Km/h (DIN)  
ZONA DI VENTO IV = 186 Km/h (CNR)

